


EventSeries®

OFC Professional Starquad Microphone Cable MLX4

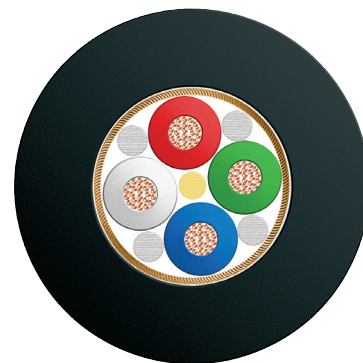

Application


MLX4 is a professional grade oxygen free microphone cable. It has a LAP screen and an enlarged sheath which is made of a very soft and flexible compound mix with matt finish. For use in noisy areas since the starquad design cancels out interference and external noise, so it's ideal for noisy areas. The cable also has a kevlar strength member adding to the cables durability.

Cable Design

Conductor	Oxygen Free Copper (28 x 0,10mm) 0,22m ²
Insulation	Special Polymer
Pair	2 pairs twisted to a starquad formation (Red / Blue / Green / White)
Strain relief	Kevlar strength member with cotton fillers
Shield	Bare copper spiral screen
Outer Jacket	TPM
Colour	see specification table

Technical Data

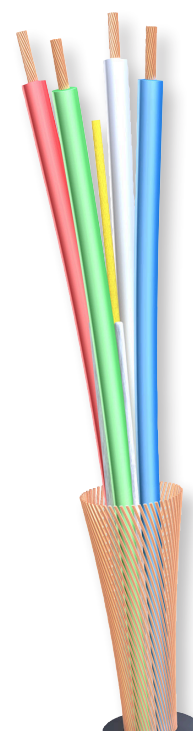


Nom. Capacitance (cond./cond.)	90	pF/m
Nom. Capacitance (cond./cond./screen)	180	pF/m
Conductor Resistance	85	Ω/km
Insulation Resistance	20	MΩ*km
Operating Voltage	50/75	V AC/DC
Test Voltage (core:core at 50Hz eff. for 1 minute)	> 1,2	kV
Test Voltage (core:screen at 50Hz eff. for 1 minute)	> 1	kV



EventSeries®

OFC Professional Starquad Microphone Cable MLX4

Specification

Cross Section	Part Number	Overall Diameter mm	Colour
	MLX4-01	$7,0 \pm 0,25$	Black
	MLX4-02	$7,0 \pm 0,25$	Blue
	MLX4-04	$7,0 \pm 0,25$	Red

Belcom Cables Ltd. ("Belcom") reserves the right to make changes to the product described in this specification without prior notice. Belcom does not assume any liability which may occur due to the use of the specification described herein. Drawings are not to scale unless otherwise specified and are provided for general and informational purposes only. All values represented in this specification should be used as a guide only and exact product details can be confirmed at point of enquiry.