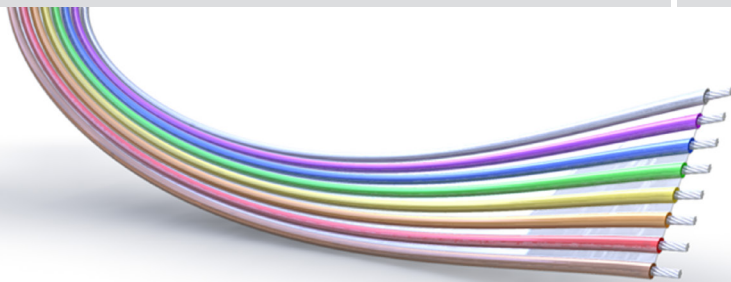



**KLASING  
Spezialkabel**


## 0.050" (1.27mm) Ribbon Rainbow

### Ribbon Construction

Conductor:	Stranded tinned copper wire
Stranding:	7/0.127mm
AWG:	28
Pitch:	1.27mm
No. of Ways:	see table
Colour Code:	Chart 15
Insulation/Outer Jacket:	Polyvinylchloride (PVC)

### Technical Characteristics

Conductor Resistance (Max.)	216 Ohm/km VDE0812
Insulation Resistance (Min.)	100 MOhm/km @20°C
Capacitance	60 pF/m
Operating Voltage	300V / 50Hz
Test Voltage	2000V / 50Hz
Temperature range	-15°C up to +105°C
Flame retardancy	UL 94 VW-1

- For all IDC Connections
- Instrumentation
- Data and Signal Transmission
- Computers
- Computer Peripherals (SCSI)
- Disk Drives
- Consumer Electronics
- Printers
- Note Available as terminated assembly to order

No. of Ways	Part Number
4	B16904
5	B16905
6	B16906
8	B16908
9	B16909
10	B16910
11	B16911
12	B16912
14	B16914
15	B16915
16	B16916
18	B16918
20	B16920
21	B16921
24	B16924
25	B16925
26	B16926
28	B16928
30	B16930
32	B16932
34	B16934
36	B16936
37	B16937
40	B16940
44	B16944
48	B16948
50	B16950
60	B16960
64	B16964

The cable images represented on this specification are indicative only and may be subject to change at Belcom's discretion. All values represented in this specification should be used as a guide only and exact details can be confirmed at point of enquiry.