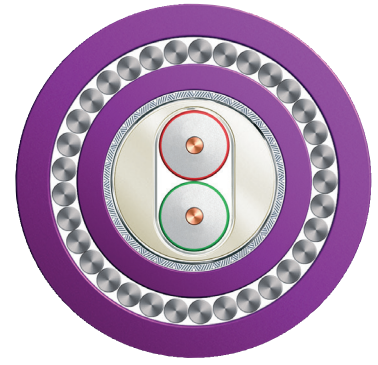


DataGuard® (SWA)

PROFIBUS DP Permanent Installation LSZH FireFighter®



Cable Design

Wire		
Conductor	Solid bare copper wire (22awg)	Ø 0,65 mm
Insulation	Foamed Polyethylene (PE) with skin	Ø 2,55 mm
Core		
Pair	2 wires twisted to a pair (RD-GN)	
Tape	Plastic tape overlapped	
Easystrip Jacket	Soft Thermoplastic copolymer	Ø 5,40 mm
Screen	Alulaminat foil overlapped	
Braid	Tinned copper wire braid, 55% coverage	Ø 6,20 mm
Inner Jacket	Low Smoke Zero Halogen (LSZH), Violet	Ø 8,0 ± 0,40 mm
Armour	DataGuard® Steel Wire Armour (DSWA)	
Outer Jacket	LSZH FireFighter®, Violet, Black or Blue	Ø 12,80 ± 0,80 mm



Characteristics

- Indoor/Outdoor applications
- Mechanical protection
- Rodent Protection
- Direct Burial
- UV-Stable and colourfast
- Flame retardant acc. to IEC 60332-3-24
- Halogen Free acc. to IEC 60754-1/2
- Smoke density acc. to IEC 61034-1/2

DataGuard® (SWA)

PROFIBUS DP Permanent Installation LSZH FireFighter®

Electrical Data @ 20°C

Loop resistance		≤	110	Ohm/km
Screen resistance		≤	9,5	Ohm/km
Insulation resistance		≥	16	GOhm*km
Characteristic Impedance	3-20 MHz		150±15	Ohm
Characteristic Impedance	31,25 - 38,4 kHz		185±18,5	Ohm
Characteristic Impedance	9,6 kHz		270±27	Ohm
Attenuation	16 MHz	≤	42	dB/km
Attenuation	4 MHz	≤	22	dB/km
Attenuation	38,4 kHz	≤	4	dB/km
Attenuation	9,6 kHz	≤	2,5	dB/km
L/R Ratio		≤	15	μH/Ohm
Inductance Value			900	μH/km
Capacitance (1 kHz)		≈	28,5	nF/km
Unbalance to ground		≤	1500	pF/km
Operating voltage (effective value)		≤	100	V
UL-Rating			600	V
Rel. Velocity of Propagation		≈	81	%
Test Voltage (DC 3 sec)		=	3600	V

Mechanical & Thermal Characteristics



Permissible temperature range	-25 ~ +80	°C
Min. Bending radius	10	x Ø (see Ø tolerance)
Weight (approx.)	362	kg/km

Belcom Cables Ltd. ("Belcom") reserves the right to make changes to the product described in this specification without prior notice. Belcom does not assume any liability which may occur due to the use of the specification described herein. Drawings are not to scale unless otherwise specified and are provided for general and informational purposes only. All values represented in this specification should be used as a guide only and exact product details can be confirmed at point of enquiry.

DataGuard® (SWA)

PROFIBUS DP Permanent Installation LSZH FireFighter®

Specification

Part Number	Cross Section	Type
14L45467-G16-C286-01		Black PROFIBUS DP ES, cable for permanent installation (easy to strip, LSZH), 2x22AWG1, DataGuard® (SWA) / LSZH FireFighter®
14L45467-G16-C286-02		Blue PROFIBUS DP ES, cable for permanent installation (easy to strip, LSZH), 2x22AWG1, DataGuard® (SWA) / LSZH FireFighter®
14L45467-G16-C286-09		Violet PROFIBUS DP ES, cable for permanent installation (easy to strip, LSZH), 2x22AWG1, DataGuard® (SWA) / LSZH FireFighter®

Belcom Cables Ltd. ("Belcom") reserves the right to make changes to the product described in this specification without prior notice. Belcom does not assume any liability which may occur due to the use of the specification described herein. Drawings are not to scale unless otherwise specified and are provided for general and informational purposes only. All values represented in this specification should be used as a guide only and exact product details can be confirmed at point of enquiry.