


H05 RR-F 300/500 V

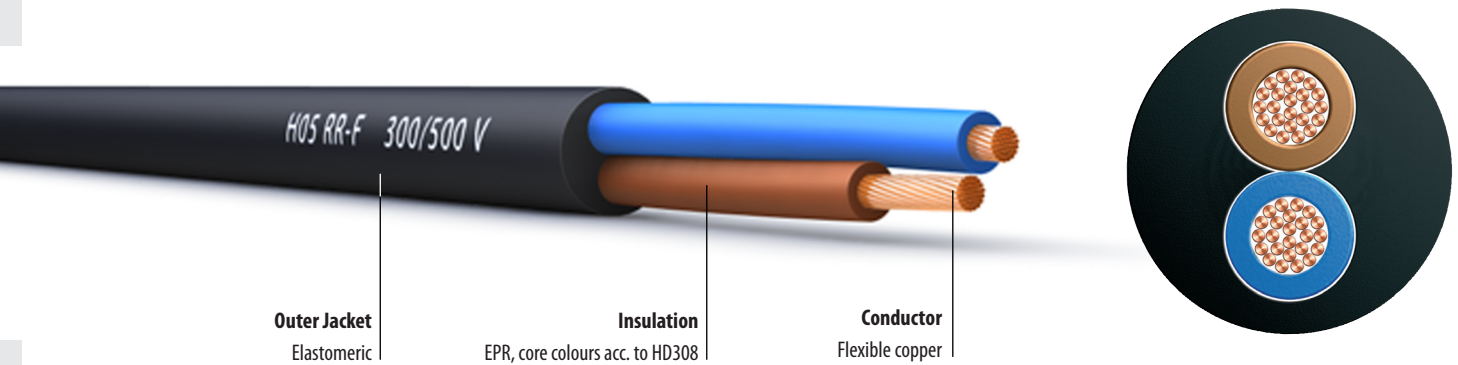

Outer Jacket
Elastomeric

Insulation
EPR, core colours acc. to HD308

Conductor
Flexible copper

Application

- For general use in household, kitchens, offices and for connection of electrical apparatus submitted to weak mechanical load (vacuum cleaner, kitchen appliance)

Properties

- Service temperature : -25°C up to +60°C
- Min. Bending radius : 4 x Ø

No. of Cores and Size mm ²	Insulation thickness mm	Outer diameter approx. mm	Weight kg/km
2 x 0.75	0.6	6.3	55
2 x 1.0	0.6	6.9	66
2 x 1.5	0.8	8.3	97
2 x 2.5	0.9	9.8	139
3 G 0.75	0.6	6.9	69
3 G 1	0.6	7.3	80
3 G 1.5	0.8	8.7	114
3 G 2.5	0.9	10.4	172
3 G 4	1.0	12.1	242
3 G 6	1.0	13.8	326
4 G 0.75	0.6	7.4	83
4 G 1	0.6	7.9	96
4 G 1.5	0.8	9.7	145
4 G 2.5	0.9	11.6	218
4 G 4	1.0	13.4	304
4 G 6	1.0	15.3	412
5 G 0.75	0.6	8.3	103
5 G 1	0.6	8.9	122
5 G 1.5	0.8	10.6	176
5 G 2.5	0.9	12.9	270