

Armada®

AICI Fibre Optic Cable LSZH SHF-1



Cable Design

Central Support Element	Dielectric strength member (FRP)
Optical Fibres	850µm tight buffered optical fibres
Colour Code	EIA/TIA 598
Stranding	The fibres are bundled around a central strength member (FRP)
Strain Relief	Water blocking aramid yarns
Inner Jacket	LSZH FireFighter SHF-1, Black
Armour	DataGuard Galvanised steel wire braid (GSWB)
Outer Jacket:	LSZH SHF-1, UV-Stabilised Black


Mechanical & Thermal Characteristics

Tensile strength (max.)	see specification table	
Bending Radius (min.)	Static	10 x Ø
	Dynamic	20 x Ø
Crush resistance	Operation	2000 N/100mm
Impact	1 impacts, 25J	
Torsion	± 1 turns/ 1m	
Watertightness*	< 3 m/24 hours	
Temperature range	Storage	-40 °C to +70 °C
	Installation	-10 °C to +70 °C
	Operating	-40 °C to +70 °C

Fire Behaviour

Flame retardant	IEC 60332-1-2
No-Fire propagation	IEC 60332-3-22
Halogen content	IEC 60754-1-2
Smoke density	IEC 61034-1-2

* steel wire braid is not watertight

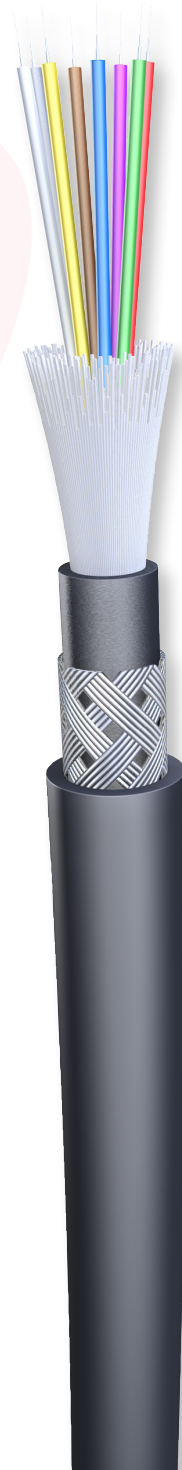

Armada[®]

AICI Fibre Optic Cable LSZH SHF-1

Specification

No. of Fibres	Tight Buffered Diameter [μm]	Overall Diameter [mm]	Weight [kg/km]	Tensile Strength (Inst./Oper.) [N]
2	850 \pm 50	7,8	88	500 / 200
4	850 \pm 50	8,0	98	600 / 240
8	850 \pm 50	9,0	110	800 / 350
12	850 \pm 50	10,0	130	1000 / 400
16	850 \pm 50	10,5	165	1000 / 400
24	850 \pm 50	12,0	190	1200 / 480

Characteristics of Optical Fibre ITU-T G652D

Nominal MFD range at 1310 nm		8,6 - 9,4	μm
Nominal MFD range at 1550 nm		9,6 - 10,6	μm
Cladding diameter		125 \pm 0,7	μm
Coating diameter		245 \pm 10	μm
Core/cladding concentricity error		\leq 0,50	μm
Cladding non-circularity		\leq 0,70	%
Attenuation	1310 nm	\leq 0,36	dB/km
Attenuation	1383 nm	\leq 0,36	dB/km
Attenuation	1550 nm	\leq 0,23	dB/km
Attenuation	1285 \div 1330 nm	\leq 0,40	dB/km
Attenuation	1530 \div 1565 nm	\leq 0,25	dB/km
Attenuation	1565 \div 1625 nm	\leq 0,27	dB/km
Chromatic Dispersion coefficient	1285 \div 1330 nm	\leq 3,0	ps/nm • km average
Chromatic Dispersion coefficient	1285 \div 1330 nm	\leq 3,5	ps/nm • km maximum
Chromatic Dispersion coefficient	1550 nm	\leq 18	ps/nm • km
Chromatic Dispersion coefficient	1625 nm	\leq 22	ps/nm • km
Zero chromatic dispersion wavelength		1302 \leq 1322	nm
Cut-off wavelength		\leq 1260	nm
Individual fibre polarization mode dispersion (PMD)		\leq 0,20	

Armada®

AI CI Fibre Optic Cable LSZH SHF-1

Characteristics Of Optical Fibre Multimode 62,5/125 IEC 60793-2-10 A1b

Core Diameter		62,5 ± 3	µm
Cladding Diameter		125 ± 2	µm
Coating Diameter		245 ± 10	µm
Core non-circularity		≤ 6	%
Cladding non-circularity		≤ 2	%
Numerical aperture		0,275 ± 0,015	
Attenuation	850 nm	≤ 3,5	dB/km
Attenuation	1300 nm	≤ 1,5	dB/km
Attenuation	850 nm	Min. 200	MHz • km
Attenuation	1300 nm	Min. 500	MHz • km

Characteristics of Optical Fibre MULTIMODE 50/125 IEC 60793-2-10 TYPE A1a.1

Core diameter		50 ± 3	µm
Cladding diameter		125 ± 2	µm
Coating diameter		245±10	µm
Core non-circularity		≤ 6	%
Cladding non-circularity		≤ 2	%
Numerical aperture		0,2 ± 0,02	
Attenuation	850 nm	≤ 3	dB/km
Attenuation	1300 nm	≤ 0,8	dB/km
Bandwidth	850 nm	Min. 500	MHz • km
Bandwidth	1300 nm	Min. 500	MHz • km

Belcom Cables Ltd. ("Belcom") reserves the right to make changes to the product described in this specification without prior notice. Belcom does not assume any liability which may occur due to the use of the specification described herein. Drawings are not to scale unless otherwise specified and are provided for general and informational purposes only. All values represented in this specification should be used as a guide only and exact product details can be confirmed at point of enquiry.