



LKSM-HF Armoured Power and Control Cable 0,6/1kV

Halogen Free • Flame Retardant • SHF-1

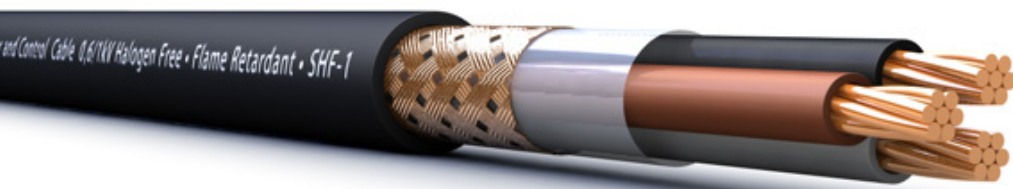

Cable Construction		Technical Characteristics	
Conductor	Stranded copper acc. to IEC 60228 class 2	Rated Voltage	0,6/1kV (1,2kV)
Insulation	XLPE plastic	Max. Conductor Temperature	+90° C
Bedding	Filler tape	Min. Recommended Installation Temp.	-15° C
Armour	Copper wire braid, >90% coverage	Lowest Operation Temperature	-40° C
Outer Jacket	Polyolefin plastic, SHF-1 LSZH		
Colour	Standard colour black, others on request		
Standards		Application	
IEC 60092-351 , IEC 60092-350 , IEC 60092-359 , IEC 60332-1-2, IEC 60332-3-22, IEC 60754, IEC 61034		For fixed installation in most areas and on open deck in ships	
Approved By ABS, Det Norske Veritas, Bureau Veritas, Lloyd's Register, Germanischer Lloyd, KR, ClassNK, Transport Canada			