



URM67 50 Ω Type PVC

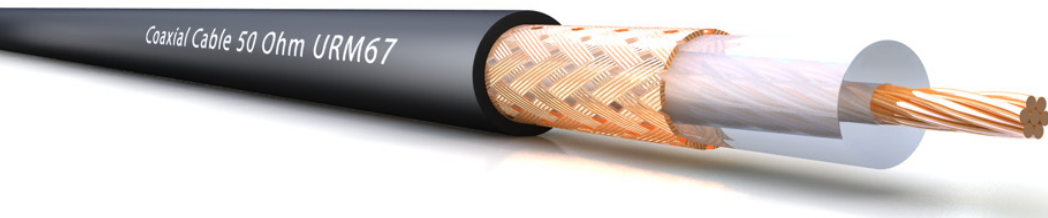

Cable Construction		Electrical Characteristics		
Inner Conductor	Stranded bare copper (7/0.75mm), \varnothing 2.30 mm	Max. Conductor DC resistance at 20°C	< 6.13 Ohm/km	
Dielectric	Solid Polyethylene, 2.475mm RT, \varnothing 7.25 \pm 0.2 mm	Min. Insulation DC resistance at 20°C	> 500 MOhm*km	
Braid	CCA, 0.16x0.008x16x12	Rated temperature	80°C	
Braid coverage	95 %	Rated Voltage	6.5 Kv RMS 10 Kv DC	
Outer Jacket	Black PVC, 1.0mm thickness, \varnothing 10.3 \pm 0.3mm	Capacitance	100 \pm 5 pF/m	
		Velocity ratio	66.6 %	
		Impedance	50 \pm 3 Ohm	
			200 MHz	9.8 dB/100m
		Attenuation at 20°C \pm 8 %	600 MHz	20 dB/100m
			1000 MHz	25 dB/100m