


Overall Foil Shielded 8core 24awg 600V Duct Grade

Cable Construction

Conductor:	Stranded Tinned Copper Wire, 7x32
AWG:	24
No. of Cores:	8
Insulation:	SR-PVC, Def-Stan colour code
Shield:	Overall Aluminium/polyester tape
Drain Wire:	Stranded Tinned Copper Wire
Outer Jacket:	Black High Density Polyethylene (HDPE)

Cross section

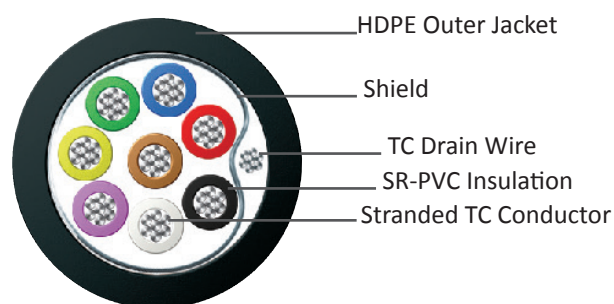

Technical Characteristics

Part Number:	5152408THD
Overall Diameter:	5.5 ± 0.5 mm
Weight:	51 kg/km
Voltage Rating:	600 volts

Electrical Characteristics

Nom. Capacitance (cond./cond.)	108 pF/m
Nom. Capacitance (con./con./shield)	213 pF/m
Nom. Conductor DC Resistance	82.5 Ω/km
Nom. Shield DC Resistance	59.4 Ω/km

The cable images represented on this specification are indicative only and may be subject to change at Belcom's discretion. All values represented in this specification should be used as a guide only and exact details can be confirmed at point of enquiry.