


SJTW Portable Cord UL/CSA Listed 300 V

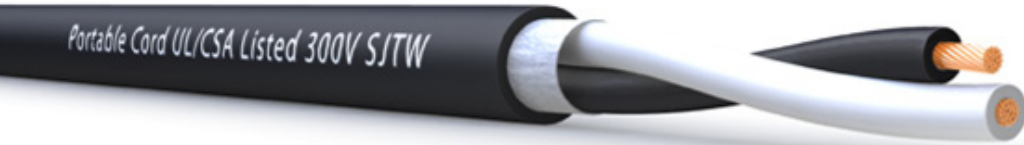

Application	Cable Construction
Portable cordage for small appliances and equipment not exceeding 300 volts in wet or dry locations	Conductor Stranded Bare Copper conductors
	Insulation Polyvinylchloride (PVC)
	2core - Black, White
	Colour Code 3core - Black, White, Green
	4core - Black, White, Red, Green
	Outer Jacket Polyvinylchloride (PVC) Black
	Temperature Range -20°C up to +60°C (also available in 105°C)
	Certification
	CSA Certified under file LL39753

No. Of Conductors	Conductor Size (AWG)	Conductor Stranding	Current Rating*	Radial Thickness Insulation (mm)	Nom. O.D. (mm)	Total Weight (kg/km)
2	18	16/30	10 A	0.76	7.37	73
2	16	26/30	13 A	0.76	8.13	99
3	18	16/30	10 A	0.76	8.13	102
3	16	26/30	13 A	0.76	8.64	125
3	14	41/30	18 A	0.76	9.27	165
3	12	65/30	25 A	0.76	10.92	248
4	16	26/30	13 A	0.76	9.5	162
4	14	41/30	18 A	0.76	10.26	215
4	12	65/30	25 A	0.76	11.95	325