


# DAI Cable Dca

LSZH FireFighter® 400Series 1x2x20awg 600 V

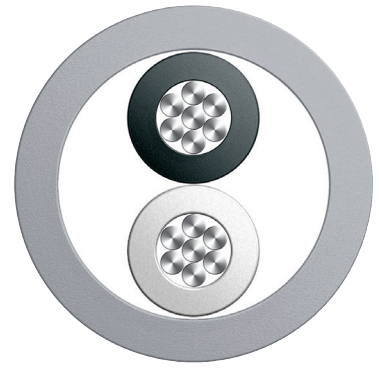

## Cable Design

Conductor	Stranded tinned copper wire (20awg)
Insulation	LSZH FireFighter®
Core Identification	Black / White
Core Stranding	2 wires twisted to a pair. 1x2x20AWG
Outer Jacket	LSZH FireFighter®

## Characteristics

- UV Stable acc. to ISO 4892-2/A
- Flame retardant acc. to IEC 60332-1-2
- Halogen Free acc. to IEC 60754-1
- Smoke Density acc. to IEC 61034
- Euroclass Dca-S2-D2-A1

## Specification

Part Number	Construction	Overall Diameter [mm]	Max. Installation Length
4001P2044-BW	1 x 2 x 20 awg	4,57 ± 0,1	100 m



Improved reaction Non-flame propagation  
Improved heat emission



# DAI Cable Dca

LSZH FireFighter® 400Series 1x2x20awg 600 V

## Electrical Characteristics

Capacitance (nom.)	80,8	pF/m
Conductor DC Resistance (nom.)	33	Ohm/km
Inductance (nom.)	0,56	μH/m
Voltage Rating	600	V
Test Voltage core/core	2000	V dc x 1 min.

*Belcom Cables Ltd. ("Belcom") reserves the right to make changes to the product described in this specification without prior notice. Belcom does not assume any liability which may occur due to the use of the specification described herein. Drawings are not to scale unless otherwise specified and are provided for general and informational purposes only. All values represented in this specification should be used as a guide only and exact product details can be confirmed at point of enquiry.*