
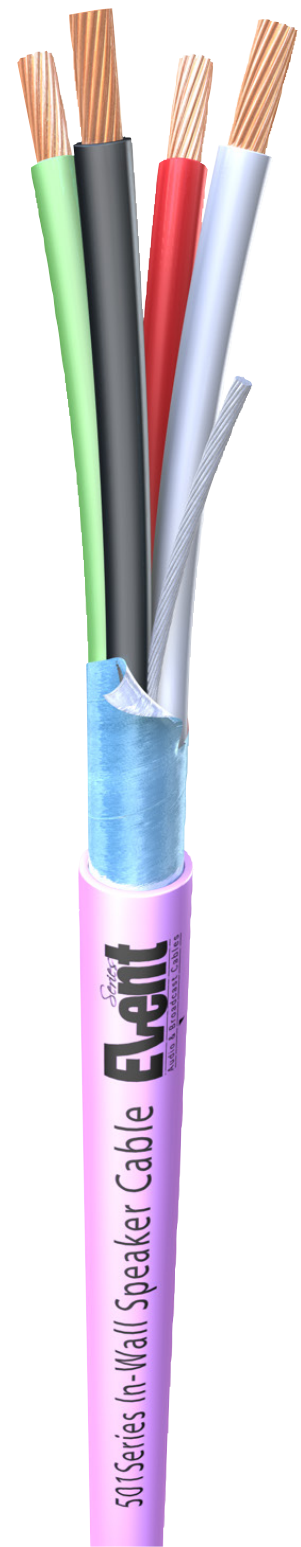


# EventSeries® Screened Installation Speaker Cable 510Series LSZH FireFighter®

## Cable Design

<b>Conductor</b>	Stranded Oxygen Free Copper
AWG	16
<b>Insulation</b>	LSZH FireFighter®
Core Identification	Black / Red / Green / White
<b>Drain Wire</b>	Stranded tinned copper
<b>Screen</b>	Aluminium/polyester tape (Aluminium inside)
<b>Outer Jacket</b>	LSZH FireFighter®
Diameter	Ø 7,13 mm
Colour	Pink RAL 3015



## Application

Our 510 series shielded installation cables can be used in normal “in-wall” installations ,the additional shield offers some protection where cables are laid near power cables. These cables are LSZH as standard and offer good levels of performance in most multi-room and home cinema installations

## Standards

Flame Retardant	IEC 60332-1 flame resistance for single cables
Flame Retardant	IEC 60332-3 flame resistance for bunched cables
Halogen Free	IEC 60754 series
Smoke Emission	IEC 61034 series

## Specification

Part Number	Construction	Overall Diameter <i>mm</i>
5104C1644-07	4 x 16awg	7,13