


# C.O/M.E.T Lighting Control

E-Bus 1x2x18awg 600 V

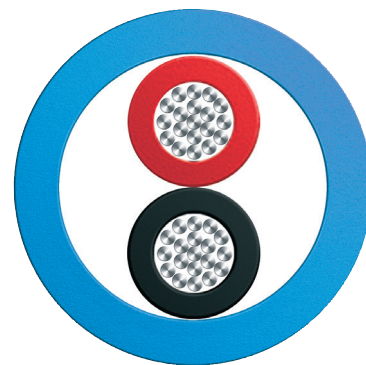

## Application

For connection of switches and sensors. Blue is suitable to use as a DALI pair.

## Cable Design

Conductor	Stranded tinned copper wire (18awg)
Insulation	LSZH FireFighter®
Core Identification	Black / Red
Core Stranding	2 cores twisted to a pair. 1x2x18AWG
Outer Jacket	LSZH FireFighter®

## Specification

Part Number	Construction	Overall Diameter [mm] ± 10%	Colour
4001P1844-02	1 x 2 x 18 awg	5,50	Blue <span style="color: blue;">■</span>
4001P1844-10	1 x 2 x 18 awg	5,50	White <span style="border: 1px solid black; display: inline-block; width: 10px; height: 10px;"></span>



## Fire Behaviour

- Flame Retardant acc. to IEC 60332-1
- Halogen Free acc. to IEC 60754
- Smoke Emission acc. to IEC 61034
- Euroclass : Dca-S2-D2-A1



# C.O/M.E.T Lighting Control

E-Bus 1x2x18awg 600 V

## Electrical Characteristics

Loop Resistance	4,4	Ohm/100m
Capacitance (cond./cond.)	80	pF/m
Voltage Rating	600	V
Test Voltage core/core	2000	V dc x 1 min.

*Belcom Cables Ltd. ("Belcom") reserves the right to make changes to the product described in this specification without prior notice. Belcom does not assume any liability which may occur due to the use of the specification described herein. Drawings are not to scale unless otherwise specified and are provided for general and informational purposes only. All values represented in this specification should be used as a guide only and exact product details can be confirmed at point of enquiry.*