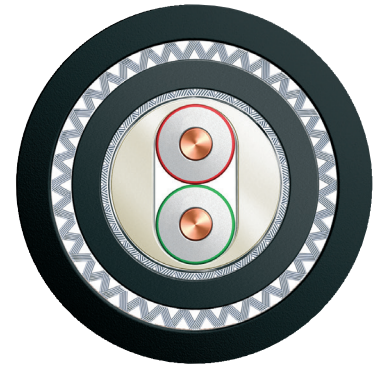


# Armada®

PROFIBUS PA Offshore DataGuard® (GSWB)



## Cable Design

### Wire

Conductor	Solid bare copper wire (18awg)	Ø 1,05 mm
Insulation	Foamed Polyethylene (PE) with skin	Ø 2,55 mm

### Core

Pair	2 wires twisted to a pair (RD-GN)	
Tape	Plastic tape overlapped	
Easystrip Jacket	Soft Thermoplastic copolymer	Ø 5,40 mm
Screen	Aluminium foil overlapped	
Braid	Tinned copper wire braid, 85% coverage	Ø 6,20 mm

Inner Jacket Low Smoke Zero Halogen (LSZH) Ø 8,0 ± 0,40 mm

Armour DataGuard® Galvanised Steel Wire Braid (GSWB)

Outer Jacket SHF-1, UV-resistant, Black or Blue Ø 11,40 ± 0,40 mm

## Characteristics

- Onshore / Offshore applications
- Mechanical protection
- Flexible Installation
- Rodent Protection
- UV-Stable and colourfast
- Flame retardant acc. to IEC 60332-3-24
- Halogen Free acc. to IEC 60754-1/2
- Smoke density acc. to IEC 61034-1/2
- IEC 60092-359



# Armada®

PROFIBUS PA Offshore DataGuard® (GSWB)

## Electrical Data @ 20°C

Conductor resistance		≤	22	Ohm/km
Insulation resistance		≥	10	MOhm*km
Capacitance (1 kHz) wire/wire		≈	50	nF/km
Capacitance (1 kHz) wire/screen		≈	92	nF/km
Characteristic Impedance	31,25 kHz		100±20	Ohm
Attenuation	39 kHz	≤	3	dB/km
Capacitance unbalance e		≤	2	nF/km
Inductance	31,25 kHz		650	μH/km
Surface transfer impedance	20 MHz	≤	5	mOhm/m
Rel. Velocity of Propagation		≈	81	%
Operating voltage			100	V
UL-Rating			600	V
Test Voltage (wire/wire/screen rms 50Hz 1 min.)			2000	V

## Mechanical & Thermal Characteristics



Permissible temperature range		-25 ~ +80	°C
Min. Bending radius		10	x Ø (see Ø tolerance)
Weight (approx.)		236	kg/km

*Belcom Cables Ltd. ("Belcom") reserves the right to make changes to the product described in this specification without prior notice. Belcom does not assume any liability which may occur due to the use of the specification described herein. Drawings are not to scale unless otherwise specified and are provided for general and informational purposes only. All values represented in this specification should be used as a guide only and exact product details can be confirmed at point of enquiry.*

# Armada®

## PROFIBUS PA Offshore DataGuard® (GSWB)

### Specification

Part Number	Cross Section	Type
24L45467-J20-C46		Black PROFIBUS PA ES, cable for Onshore/Offshore applications (easy to strip), 2x18AWG1 DataGuard® (GSWB)/LSZH FireFighter®
24L45467-J20-C86		Blue PROFIBUS PA ES, cable cable for Onshore/Offshore applications in hazardous Ex-areas (easy to strip), 2x18AWG1, DataGuard® (GSWB)/LSZH FireFighter®

*Belcom Cables Ltd. ("Belcom") reserves the right to make changes to the product described in this specification without prior notice. Belcom does not assume any liability which may occur due to the use of the specification described herein. Drawings are not to scale unless otherwise specified and are provided for general and informational purposes only. All values represented in this specification should be used as a guide only and exact product details can be confirmed at point of enquiry.*