



LAN Cable


TIA/EIA T568A Versus T568B

TIA/EIA 568-A (T568A) Standard was established in 1985 at the request of the Computer Communications Industry Association to create a standard for telecommunication cabling by the Electronic Industries Alliance (EIA). Further revisions were made due to major developments in networking technology and faster high-speed Ethernet cables giving us the current TIA/EIA 568-B Standard.

Standard LAN (Local Area Network) cables such as 4 pair CAT 5E are terminated using RJ45 plug, the pins on these connectors are numbered 1 to 8. Each pair has a specific colour code and is placed into a specific location as detailed below.

TIA/EIA 568-A (T568A)

- Pin 1 - White / Green stripe
- Pin 2 - Green
- Pin 3 - White / Orange stripe
- Pin 4 - Blue
- Pin 5 - White / Blue stripe
- Pin 6 - Orange
- Pin 7 - White / Brown stripe
- Pin 8 - Brown

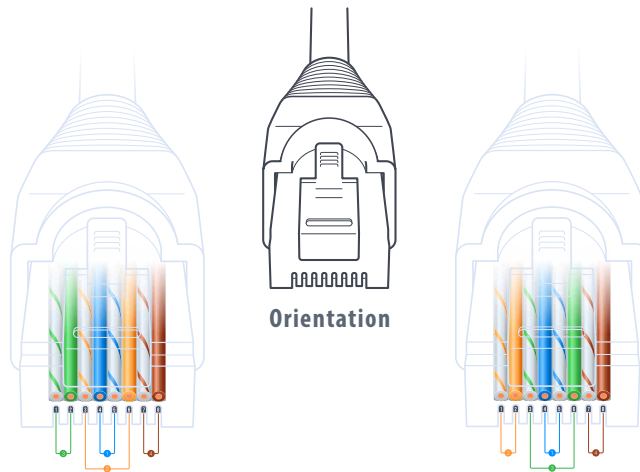

TIA/EIA 568-B (T568B)

- Pin 1 - White / Orange stripe
- Pin 2 - Orange
- Pin 3 - White / Green stripe
- Pin 4 - Blue
- Pin 5 - White / Blue stripe
- Pin 6 - Green
- Pin 7 - White / Brown stripe
- Pin 8 - Brown

Orientation : In this image the view is looking at the connector terminal face with contacts and the latch uppermost. When cable and connector are being mated it is easy to get the connector upside down and effectively reverse the correct pin location. Similarly some images show pin outs from the rear of the connector which can easily be confused as forward images resulting again in reverse pin outs. When using an image for reference take time to understand the orientation of the view to ensure correct termination.

If you are making a patch cable, you will construct the cable using identical pin assignments on each end. Although it does not matter which standard you use for this, the 568-B standard is usually used in the United States.

Crossover termination example:

If you are making a crossover cable, you will construct the cable using the 568-A standard on one end, and the 568-B standard on the other.

