



# Armada®

RS-485 2x2x22/7 AWG SF/UTP LSZH-SHF2




## Application

Offshore installations, Maritime Environment, RS-232, Fixed or portable installations, RS-422, Industrial communication, RS-485, High Noise Environments

## Cable Design

Pair	
Conductor	Stranded annealed tinned copper wire, 22awg (7/0,25mm)
Insulation	Cellular PO Ø 2,13 mm nom.
Twisting	2 insulated conductors twisted to a pair
No. of Pairs	
Identification	Blue x White, Orange x White
Overall Shield	
Foil Screen	Aluminium/polyester tape
Drain wire	Stranded annealed tinned copper wire, 24awg
Braid	Annealed tinned copper wire braid, 85% coverage
Outer Jacket	
Outer Diameter	Ø 10,5 mm nom.
Weight	125 kg/km

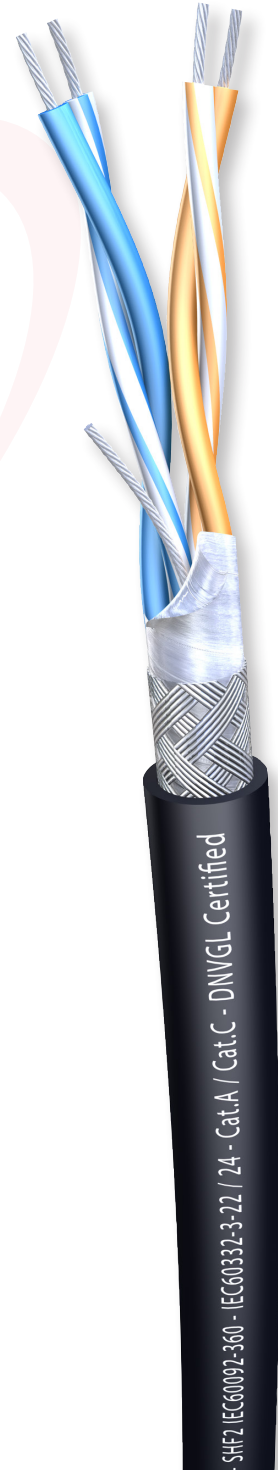

## Specification

Part Number	Type
AMR222-UAZF2	Armada® RS-485 2x2x22/7 AWG SF/UTP LSZH-SHF2



# Armada®

RS-485 2x2x22/7 AWG SF/UTP LSZH-SHF2

## Standards

Applicable Standards	DNV-GL certified, IEC 60092-359, IEC 60092-350, IEC 60811-2-1, ASTM G 154, RoHS-2 2011/65/EU
Flamability Rating	IEC 60332-1, IEC 60332-3, IEC 60754-1/2, IEC 61034-1/2, UL 1581 VW-1

## Performance

Impedance	120	Ohm
Attenuation	@ 1 MHz	1,7 dB/100m
	@ 10 MHz	5,0 dB/100m
NEXT Attenuation	@ 1 MHz	47 dB
	@ 10 MHz	35 dB
Transfer Impedance		Grade 1
Coupling Attenuation		Type 1
Max. DC Resistance	55	Ohm/km @ 20°C
Max. Resistance Unbalance	2	%
Dielectric Strength	700	V/minute
Dielectric Strength to Shield	700	V/minute
Voltage Rating	300 (*)	V
Min. Bend Radius	70	mm
Max. Operating Temperature	+75	°C
Min. Operating Temperature	-30	°C
UV resistance	Yes	

(\*) Cable voltage rate is 300 V, however the cable is not intended to be used as power transmission cable.

*Belcom Cables Ltd. ("Belcom") reserves the right to make changes to the product described in this specification without prior notice. Belcom does not assume any liability which may occur due to the use of the specification described herein. Drawings are not to scale unless otherwise specified and are provided for general and informational purposes only. All values represented in this specification should be used as a guide only and exact product details can be confirmed at point of enquiry.*